



Manual
Gebruiksaanwijzing
Gebrauchsanweisung
Mode d'emploi
Bruksanvisning
Brugsvejledning
Käyttöopas
Uživatelská příručka
Použivatelská příručka
Εγχειρίδιο χρήσης

مدخست ملى لى لى

XP300



#MOREENERGY

XTREME SERIES - Maximum portable power

1



74.000mAh Li-ion / 281Wh


240x142x154mm

3,3kg

DC 6.5mm input port 72W (26V max)
USB-C PD input 60W
Output AC 300W (220V / 50Hz)
Output 2x DC 5.5mm port 60W (12V/5A)
Output Car charger 120W (12V/10A)
Output USB 1x USB-C PD 60W (5V/3A, 9V/2.2A, 12V/1.5A)
1x USB-A QC 3.0 18W (5V.3A, 9V/2A, 12V/1.5A)
2x USB-A (5V/3.1A)

Max output: 300W

+ Power cord, MC4 to DC 6.5mm converter cable, manual

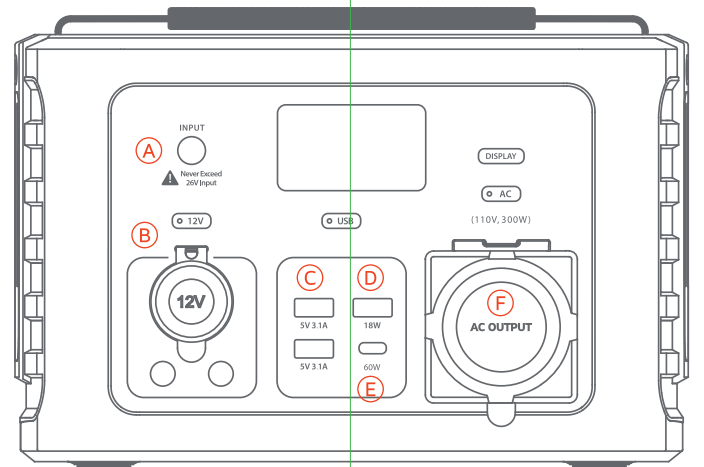

- A DC 6.5mm input port: 72W (26V max)
- B Output 2x DC 5.5mm port: 60W (12V/5A)
Output Car charger: 120W (12V/10A)
- C 2x USB-A (5V/3.1A)
- D 1x USB-A QC 3.0 18W (5V.3A, 9V/2A, 12V/1.5A)
- E 1x In/Output USB-C PD 60W (5V/3A, 9V2.22A, 12V/1.5A)
- F Output AC 300W (220V / 50Hz)

2

HOW TO USE THIS POWERSTATION

Press the button on the output you want to use

FOR USB/DC OUTPUT: Press 1 second
FOR AC OUTPUT: Press 2 seconds

The output is working when the green light turns on. You can now use this output

TIP: when not using an output, turn it off to save energy.

3



4


CHARGING FROM WALL CHARGER:

Use the included AC charging adapter to connect to the 6.5mm DC input port. (max 72W)
You can also connect a use a USB-C PD charger to the USB-C port. (max 60W)

CHARGING FROM A SOLAR PANEL:

Connect your Solar Panel directly to the 6.5mm DC input port.
If your solar panel has an MC4 connector, please use the adapter cable that is included.


IMPORTANT NOTE:
When using a Solar Panel to recharge the Power Station, make sure the power does not exceed 26V.
If more power is used it can cause serious damage to the unit.



7






RECHARGING THE POWER STATION
The Power Station is fully charged when the LCD display shows 100%.

8

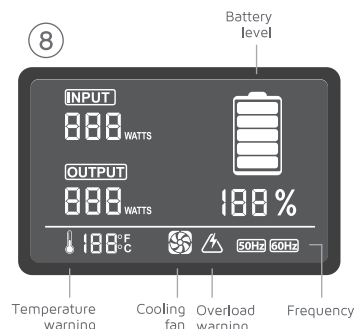

Temperature warning Cooling fan Overload warning Frequency

9



20.000mAh

15.000mAh

10.000mAh

5000mAh

2500mAh

XTREME SERIES - Maximum portable power

